




Innovations in Bamboo



Edge Grain Amber



Edge Grain Natural

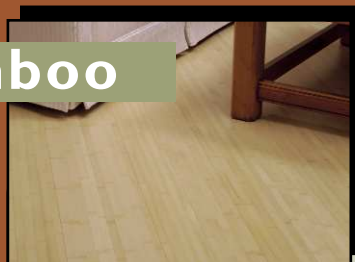

Flat Grain Natural



Flat Grain Amber

Material

100% Bamboo

Standard Sizes

5/8" x 3 3/4" x 76 1/4"
1/2" x 3" x 72"

Finish

Multi-coat Aluminum Oxide System

Fire Rating

Class I rating
ASTM E-648 critical radiant flux

Emissions

0.02 ppm (ASTM E 1333)
Currently meets or exceeds proposed California
Air Resources Board final Phase 2
formaldehyde emission levels of 0.03 ppm
(parts per million), effective January 1, 2011

Hardness Rating

Average Hardness 1700 lbf
Janka Ball Hardness Test (ASTM D1037)

Dimensional Stability

(80% - 20% relative humidity)
Linear Expansion:
parallel -0.03%
perpendicular: -0.09%
Thickness Swell: -0.2% (ASTM D1037)

Finish Rating

23,500 rotations, 4B adhesion rating
(ASTM D4060, CS 17 wheel, taber abrasion
ASTM D3359 adhesion)

Slip Resistance

Static Friction coefficient 0.522
Sliding Friction coefficient 0.564 (ASTM D2394)

Unique to the hardwood flooring industry, Plyboo® bamboo flooring has grown in popularity and can now be found in homes all over America. With its easy installation, durability, and good looks, homeowners are choosing Plyboo® for its adaptability to design themes, from contemporary to tropical, from traditional to that Asian touch.

toll-free 866.835.9859